



# FlexSecure FS 35



The FlexSecure FS 35 rates High Security per the ISO 17712:2013 testing standard and is C-TPAT and PIP compliant. This versatile seal fits many applications and is popular for sealing bulk railcars and intermodal containers and trailers. The non-preform cable frays wildly when cut and is galvanized for corrosion protection. The patent pending locking mechanism inside the anodized aluminum housing makes sure your goods are safe in transit.

**C-TPAT & PIP COMPLIANT**



## APPLICATIONS

- Cross Border Shipments
- Container Door Latches
- High Value Shipments
- Rail Cars
- Trailer Door Latches

## FEATURES

- ISO 17712 classification - High Security
- Tamper-evident non-preformed steel cable unravels when cut and is galvanized for corrosion protection
- Customized laser printing name/logo/consecutive numbers and barcode
- Patent Pending

## MATERIAL


- Main body: Aluminum alloy
- Internal Locking Components: Zinc and Steel
- Cable: 3.5 mm galvanized non-preformed aircraft cable

## STRENGTH CHARACTERISTICS

- Average pull apart strength: 2400 lbs.(1088kg)

## DIMENSIONS

Body: 1.12" x .90" x .30" (28.6 mm x 22.7 mm x 7.6 mm)  
 Cable Diameter: 3.5 mm (1/8")  
 Overall length: Standard 12" (Custom lengths available)

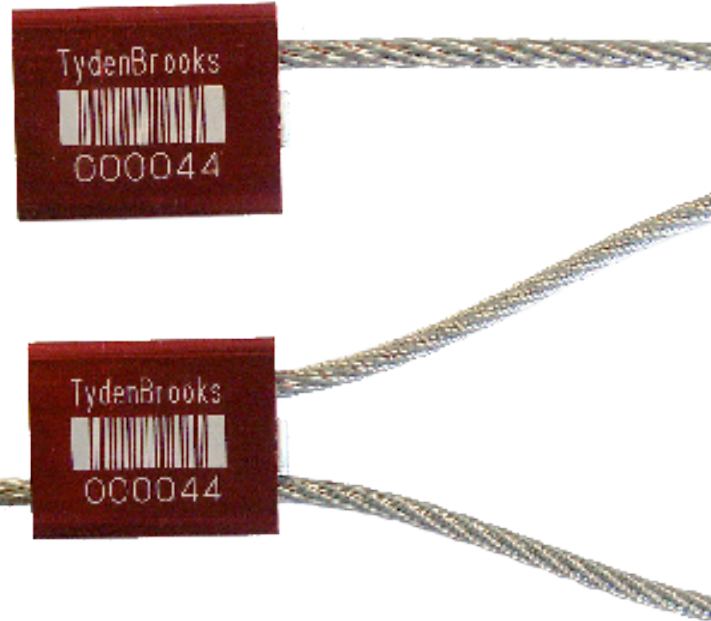

# FlexSecure FS 35



## MARKING/PRINTING

Laser Printing: Name, logo, consecutive numbers, barcode.

## STANDARD COLORS

Red / Blue / Green / Black



## PACKAGING

Standard: 10 per tray

200 seals per carton

Box dimensions: 22"x 10"x 8" (56cm x 25cm x 20cm)

Weight: 18 lbs. (8.25 kg)

